


Ventilation Systems
Fan Filter
 風扇過濾器

245-320m³/h

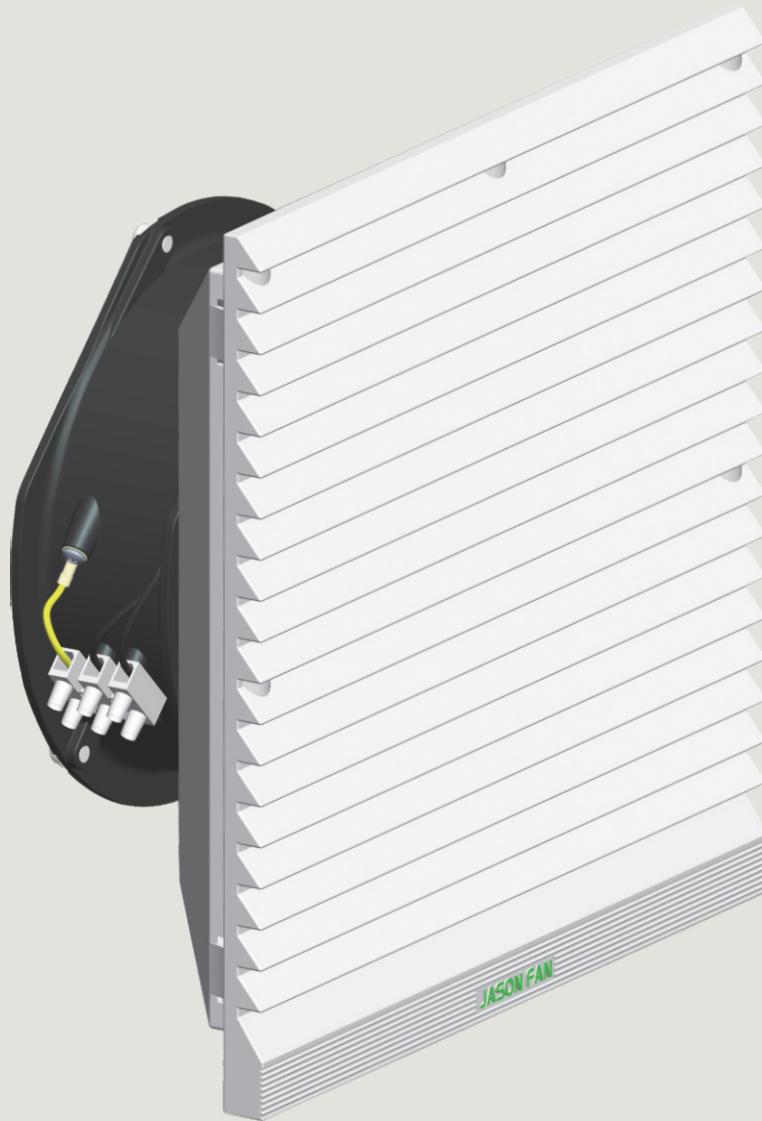


Characteristics:

- ① It comprises of a axial fan, a protective housing on the front and rear surfaces and filter designed to retain dust particles.
- ② The filters that equip the fans must be cleaned and replaced regularly.
- ③ This filter can be replaced during operation without risk of touch with the rotating part.
- ④ Material of filter pad: 100g/ M3 nylon fiber compound, Filtration efficiency up to 7 3%.
- ⑤ Operation Temperature/Humidity Range: (under unconcretionary state) -20°C ~ +70°C (temperature), 0% ~ 95% (humidity)
- ⑥ RAL 7035 grey is the standard offer with the possibility to change to RAL 7032 by means of a replacement grille.
- ⑦ Bear in mind the pressure losses caused by the outlet element (grille with filter, ventilation louvre or simple opening) when determining the fan flow rate.
- ⑧ Protection class: E N 60 5 29 I P 5 4 (not suitable for outdoor equipment).


特點:

- ① 由軸流風扇與前后保護外殼和阻擋粉塵的過濾面板組成。
- ② 空氣扇的過濾面板必須定期清洗和更換。
- ③ 風扇運行時，可以對過濾面板進行更換，而不會有碰到風扇旋轉部分的危險。
- ④ 過濾材料：150g/ M3 尼龍纖維合成，過濾效率達7 3%
- ⑤ 運行溫/濕度範圍：（非凝結狀態）溫度 -20°C ~ +70°C
濕度 0% ~ 95%
- ⑥ 標準顏色為RAL7035灰色，可換成RAL7032，只需通過更換葉柵。
- ⑦ 在計算風扇流量的時候謹記由外部因素導致的壓力損失
帶過濾面板的葉柵，百葉窗形通風，或簡單的開口）。
- ⑧ 防護等級：E N 60 5 29 I P 5 4 （不適用於戶外設備）。

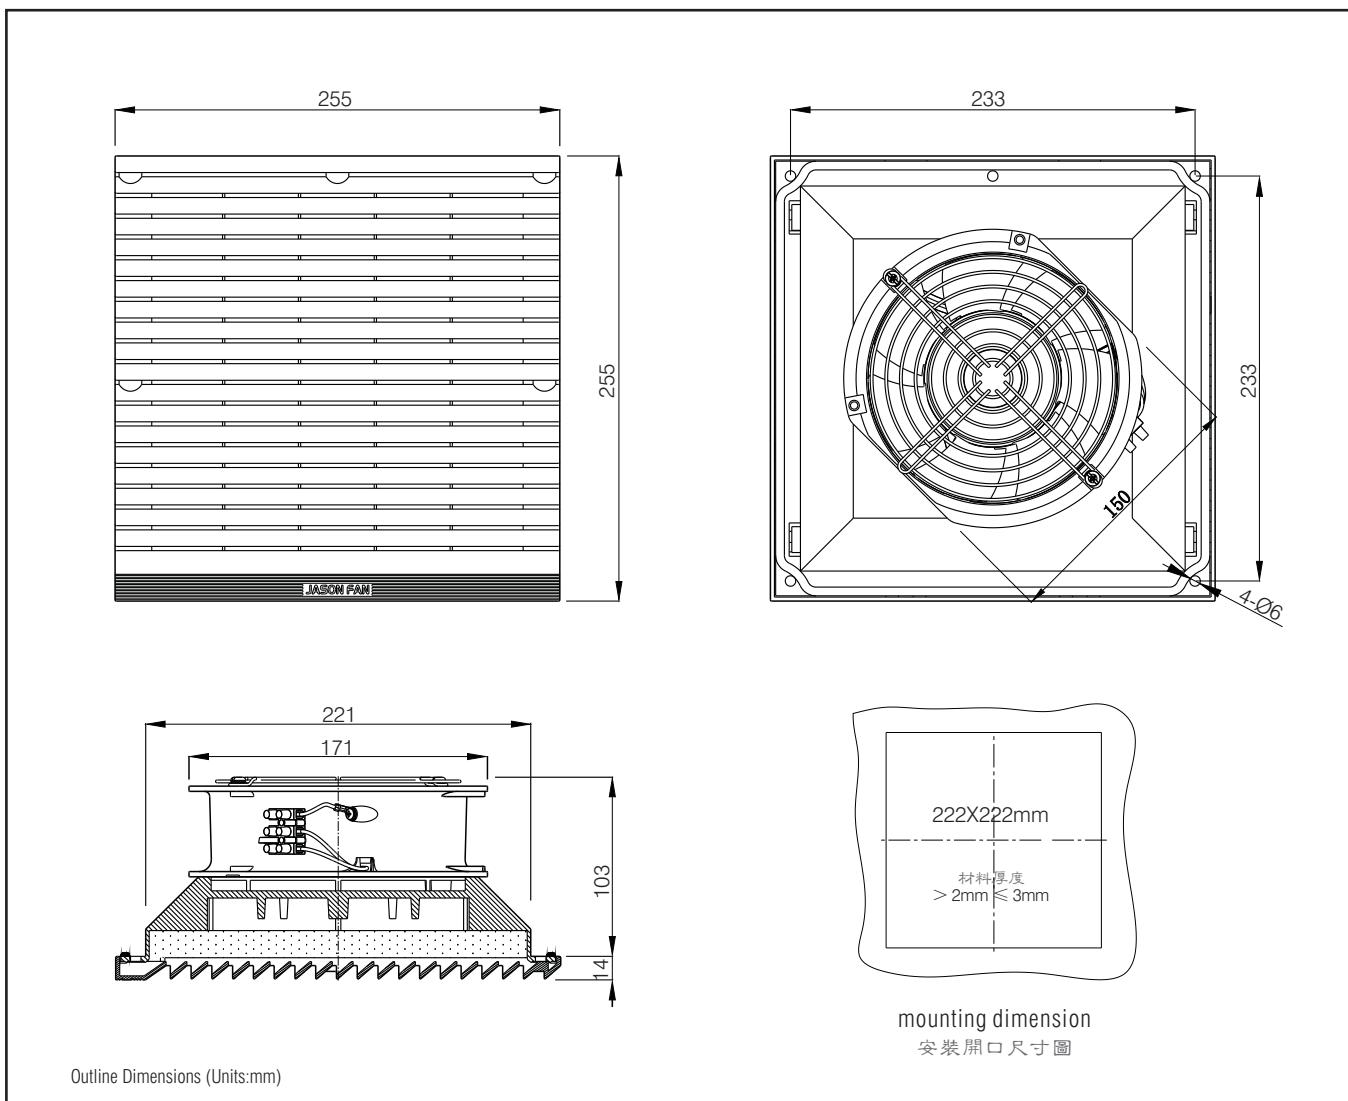

- Ⓐ Installation: Snap-in and screw installation
- Ⓑ Power connection: Terminal connection
- Ⓒ With seal ring
- Ⓓ Maximum weight: 1.45kg

- Ⓐ 按裝方式：卡入式及螺絲按裝
- Ⓑ 電源連接：端子連接
- Ⓒ 帶有密封圈
- Ⓓ 最大重量：1.45kg

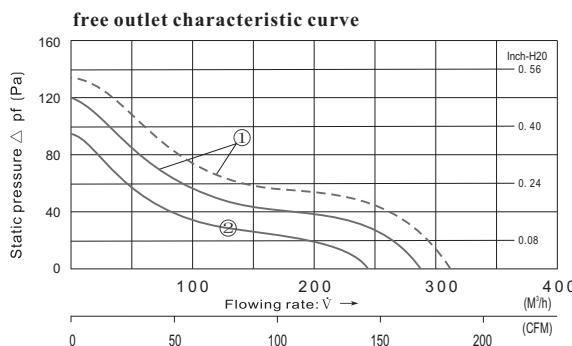

Parameters

Type 產品型號	Fan Model 風扇型號	Rated Voltage 額定電壓 V	Speed 電壓範圍 V	Frequency 周波數 Hz	current 電流 (A)	Power 功率 (W) _{+10%} _{-20%}	Max Air Flow 最大風量 m³/h	Static Pressure 最大靜壓 (Pa)	Noise 噪音 (dB)	Curve 曲線	external dimensions 外形尺寸 (mm)
FJK6625PB115	FJ15051ABH	115 AC	75...125	50	0.48	41	280	120	48	①	255x255x117
				60	0.46	38	320	135	50		
FJK6625PB230	FJ15052ABH	230 AC	150...250	50	0.26	41	280	120	48	①	255x255x117
				60	0.24	38	320	135	50		
FJK6625PB12	FJ15050PB12	12 DC	8...15		1.05	12	245	95	48	②	255x255x117
FJK6625PB24	FJ15050PB24	24 DC	12...28		0.50	12	245	95	48		
FJK6625PB48	FJ15050PB48	48 DC	28...60		0.24	11.5	245	95	48		