




SANWAY AUDIO

<https://www.china-sanway.com>

DE880TN



SPECIFICATIONS¹

| | |
|--|----------------|
| Throat Diameter | 36mm (1.4in) |
| Nominal Impedance | 16 Ω |
| Minimum Impedance | 11.0 Ω |
| Nominal Power Handling ² | 110W |
| Continuous Power Handling ³ | 220W |
| Sensitivity ⁴ | 109.0dB |
| Frequency Range | 0.5-18.0kHz |
| Recommended Crossover ⁵ | 1.2kHz |
| Voice Coil Diameter | 75mm(3.0in) |
| Winding Material | Aluminium |
| Inductance | 0.12 mH |
| Diaphragm Material | Titanium |
| Flux Density | 1.85T |
| Magnet Material | Neodymium Ring |

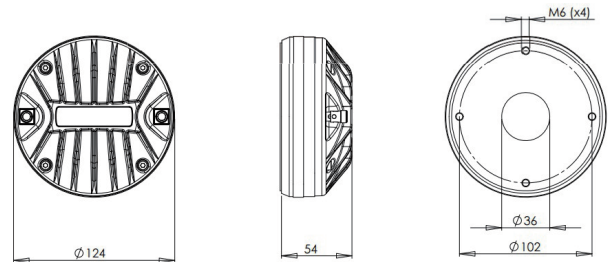

MOUNTING AND SHIPPING INFO

| | |
|---|------------------------------------|
| Four M6 holes 90° on 102 mm (4in)diameter | |
| Overall Diameter | 124mm (4.9in) |
| Depth | 54mm(2.13in) |
| Net Weight | 2.1 kg (4.6lb) |
| Shipping Units | 4 |
| Shipping Weight | 9.0 kg (19.8lb) |
| Shipping Box | 310x165x230 mm(12.20x6.50x9.06 in) |

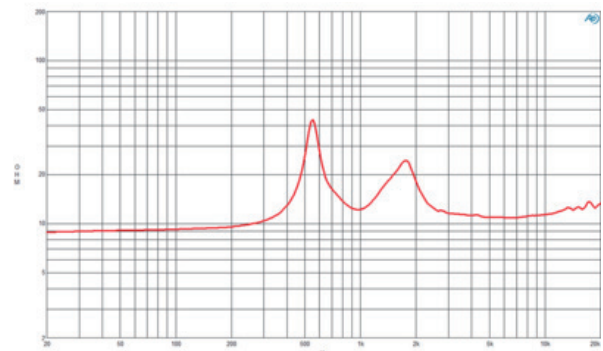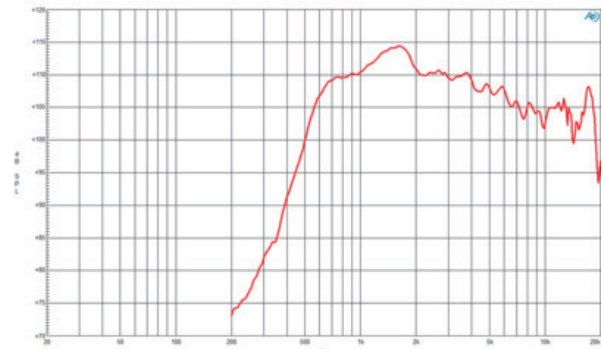

1. Driver mounted on B&C ME 90 horn.
2. 2hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20kHz. Power calculated on rated nominal impedance.
3. Power on Continuous Program is defined as 3dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 4V for 16ohms Nominal Impedance.
5. 12dB/oct. or higher slope high-pass filter.