


N = Main Power Wire 主電源線  
 Hi = High Speed Running 高速運行  
 Med = Medium Speed Running 中速運行  
 Low = Low Speed Running 低速運行  
 PE = Earth Wire 地線  
 C = Capacitor 電容器  
 TOP = Thermal Protector 熱保護

Outline Dimensions (Units:mm)

Single Phase Capacitor Motor Wiring Diagram

- Ⓐ Rotation direction of blades : CW seen from the front impellers
- Ⓑ Power Connection: UL3266-18 Lead wire
- Ⓒ Unit weight: 1.24kg

- Ⓐ 風扇旋向: 從扇葉方向看為順時針
- Ⓑ 電源連接: UL3266-18 引線連接
- Ⓒ 單機重量: 1.24kg

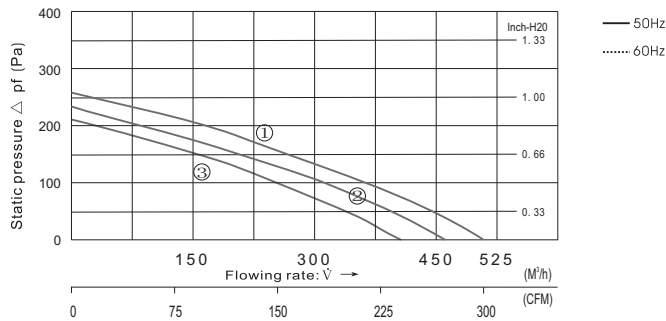

## Parameters

Type 產品型號	Motor 電機	Rated Voltage 額定電壓 V	Frequency 周波數 Hz	current 電流 (A)	Power 功率 (W) +10% -20%	Speed 回轉速度 (min <sup>-1</sup> )	Max Air Flow 最大風量 CFM m <sup>3</sup> /h	Static Pressure 最大靜壓 (Pa)	Noise 噪音 (dB)	Curve 曲線	Capacitor 電容 (μF)
C2E-175.42TS	M2E9201-TS	240	50	0.22	53	2600	296 500	260	62	①	2.0/450
			50	0.20	44	2380	270 459	240	60	②	
			50	0.20	41	2140	242 410	210	58	③	