



for

LED



BuLED

BuLED-50E-SEO LED light accessory to replace MR16 fitting for Seoul modulars

Features VS Benefits

- * BuLED-50E LED light accessory includes one LED cooler and one LED housing to be assembled with Seoul modules to replace MR16.
- * Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- * For spotlight and downlight designs from 500 to 1800 lumen.
- * Thermal resistance range Rth 3.7°C/W.
- * Heatsink Diameter 48mm - Standard height 50mm , Other heights on request.
- * Housing Diameter 50mm - Standard height 50mm , Other heights on request.
- * Modular design with mounting holes foreseen for direct mounting of Seoul ZC LED engines.
- * Extruded from highly conductive aluminum.



Zhaga LED engine and radiator assembly is a unified future international standardization


- * Below you find an overview of Seoul LED modules which standard fit on the BuLED-50E series.
- * In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of Star LED Heat Sinks.



SEOUL SEMICONDUCTOR



STUCCHI
A.A.G.
ideas are made of light

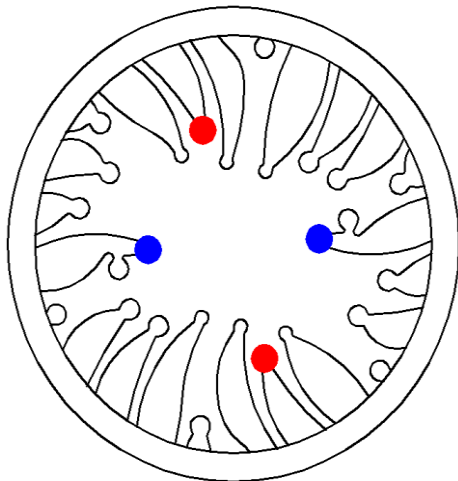

Seoul COB engines Mounting Options

ZC4 Series COB Modules:

- SDW01F1B;
- SDW81F1B;

ZC6 Series COB Modules:

- SDW01F1C;
- SDW81F1C;
- SDW91F1C;

- Zhaga Book 11 hoder;
- Red indicator marks
- BJB Spotlight connector:47.319.6060.50;
- AAG.STUCCHI:8100-G2;
- Mounting with 2 screws M3x6.5mm.
- Direct mounting with 2 screws M3x6.5mm.
- Blue indicator marks



BuLED

BuLED-50E-SEO LED light accessory to replace MR16 fitting for Seoul modulators

Mounting Options and Drawings & Dimensions

Example: BuLED-50E-SEO-B-1,2

Example: BuLED-50E-SEO-**1** - **2**

- 1** Anodising Color
 - B-Black
 - C-Clear
 - Z-Custom

- 2** Mounting Options - see graphics for details Combinations available
 - Ex.order code - 12 means option 1 and 2 combined

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.




SEOUL SEMICONDUCTOR



STUCCHI
Ideas are made of light

MOUNTING OPTION	Module type	Holder NO.	THREAD	THREAD DEPTH	THREAD HOLE DISTANCE
1	ZC4 ZC6	/	M3	6.5mm	19.0mm/ 2-@180°
2		AAG.STUCCHI 8100-G2	M3	6.5mm	25.0mm/ 2-@180°
	BJB 47.313.6060.50				

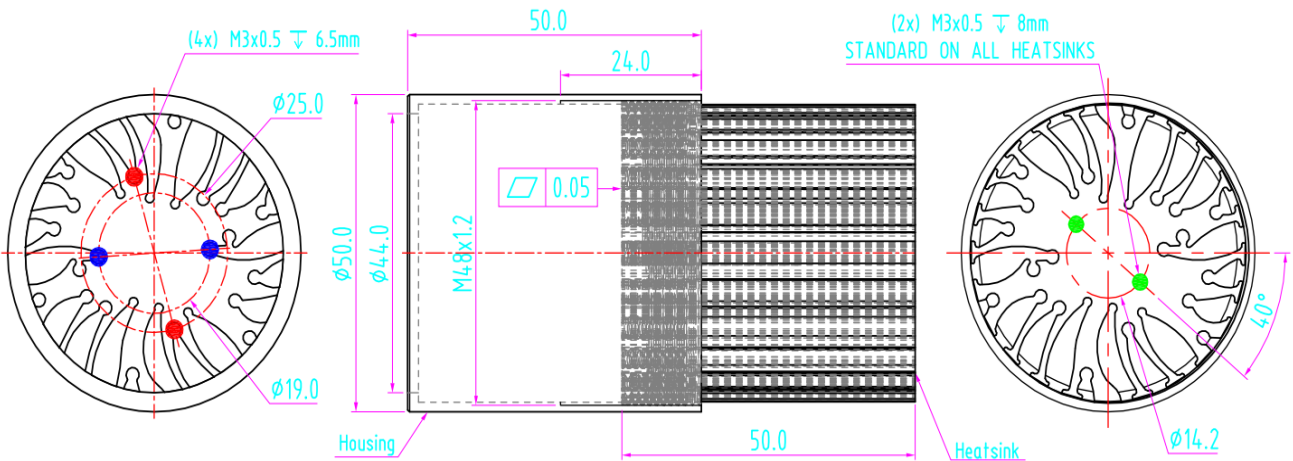

BuLED

BuLED-50E-SEO LED light accessory to replace MR16 fitting for Seoul modulars

The thermal data table

	 BuLED
Model No.	BuLED-50E-SEO
Heatsink Size	Φ48xH50mm
Housing Size	Φ50xH50mm
Material	AL6063-T5
Finish	Black Anodized
Weight(g)	160.0
Thermal Wattage	15.0W
HeatsinkOs-a²	36868
Thermal Resistance (°C/W)²	3.7

Dissipated Power Pd(W)	Pd = Pe x (1-ηL)	
	Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)
	BuLED-50E-SEO	BuLED-50E-SEO
2.5	5.6	14.0
4.5	5.3	24.0
7.0	4.6	32.0
9.5	4.3	41.0
12.0	4.1	49.0
15.0	3.7	55.0

