



for

LED



*GooLED*

**GooLED-LUME-4850 Pin Fin Heat Sink  $\Phi$ 48mm for Lumens**

**Features VS Benefits**


- \* The GooLED-LUME-4850 Lumens Pin Fin LED Heat Sinks are specifically designed for luminaires using the Lumens LED engines.
- \* Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- \* For spotlight and downlight designs from 500 to 1,600 lumen.
- \* Thermal resistance range Rth 5.0°C/W.
- \* Modular design with mounting holes foreseen for direct mounting of Lumens Ergon COB series, and AC-ALL series LED engines.
- \* Diameter 48.0mm - standard height 50.0mm Other heights on request.
- \* Forged from highly conductive aluminum.



**Zhaga LED engine and radiator assembly is a unified future international standardization**

- \* Below you find an overview of Lumens COB's and LED modules which standard fit on the Pin Fin LED Heat Sinks.
- \* In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED Pin Fin LED Heat Sink.

**LUMENS**

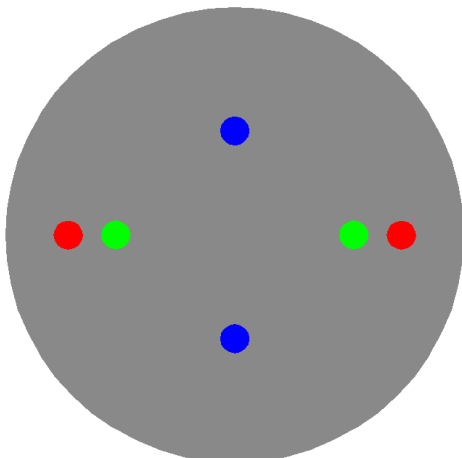

**Lumens LED Modules directly Mounting Options**

**Lumens Ergon COB\_HO, COB\_HO+, COB\_HE Series :**

- ERC1812xxxxHO;                      ERC1812xxxxHE;
- ERC1820xxxxHO;                      ERC1820xxxxHE;

With the Zhaga Book 3 holders for the red indicator marks.  
 (Ideal Holder:50-2101CR);  
 (BJB holder:47.319.2131.50);  
 Without the holders for the green indicator marks.  
 Direct mounting with machine screws M3x6.5mm.

**Lumens Ergon COB\_HO, COB\_HO+, COB\_HE Series :**

- ERC1507xxxxHO;                      ERC1507xxxxHO+;
- ERC1512xxxxHO;                      ERC1512xxxxHO+;
- ERC1507xxxxHE;

With the Zhaga Book 11 holders for the green indicator marks.  
 IDEAL Holder:50-2001CR;  
 BJB Holder:47.319.6104.50;  
 Without the holders for the blue indicator marks.  
 Direct mounting with machine screws M3x6.5mm.

**Lumens AC-ALL Series :**

- EDC/38C/8W/xxx/120V/B              EDC/38C/8W/xxx/230V/A;
- EDC/47C/10W/xxx/120V/B;            EDC/47C/10W/xxx/230V/A;
- EDC/47C/12W/xxx/120V/B;            EDC/47C/12W/xxx/230V/A;
- EDC/47C/15W/xxx/120V/B;            EDC/47C/15W/xxx/230V/A;

With the Zhaga Book 3 holders for the red indicator marks.  
 Direct mounting with machine screws M3x6.5mm.  
 Please refer to the [www.lumensleds.com](http://www.lumensleds.com) data provided on the manual.



#### Mounting Options and Drawings & Dimensions

Example:GooLED-LUME-4850-B-1,2


Example:GooLED-LUME-48 **1** - **2** - **3**

- 1** Height (mm)
- 2** Anodising Color
  - B-Black
  - C-Clear
  - Z-Custom
- 3** Mounting Options - see graphics for details Combinations available  
Ex.order code - 12  
means option 1 and 2 combined

#### Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.

MOUNTING OPTION	Module type	Holder NO.	THREAD	THREAD DEPTH	THREAD HOLE DISTANCE
1	Ergon COB (15.85x15.85)	/	M3	6.5mm	22.0mm/ 2-@180°
2	Ergon COB (17.85x17.85)	/	M3	6.5mm	25.0mm/ 2-@180° (Zhaga book 11)
	Ergon COB (15.85x15.85)	BJB Holder 47.319.6104.50 Ideal Holder 50-2001CR			
3	AC-ALL Series	Lumens	M3	6.5mm	35.0mm/ 2-@180° (Zhaga book 3)
	Ergon COB (17.85x17.85)	BJB Holder 47.319.2131.50 Ideal Holder 50-2101CR			

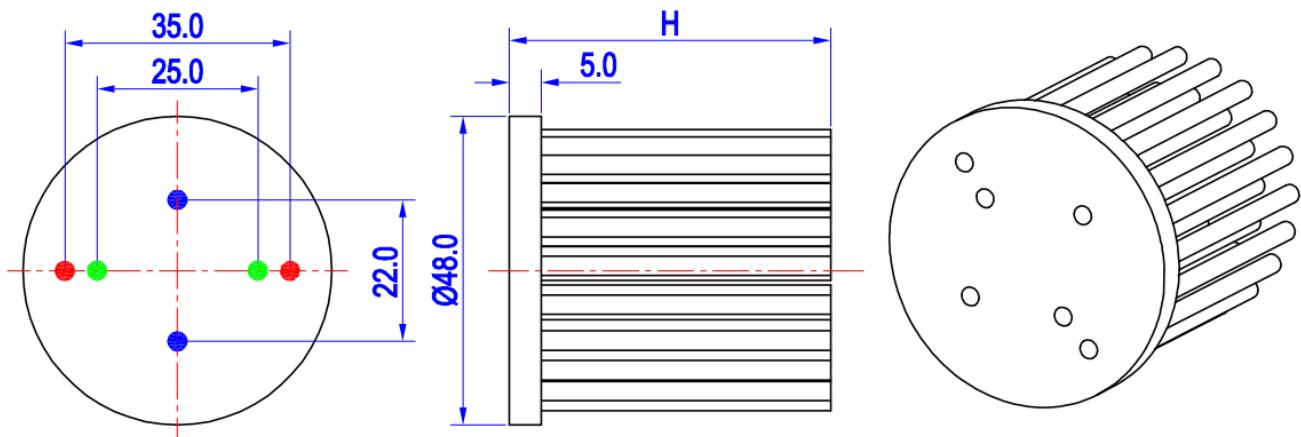

## GooLED

### GooLED-LUME-4850 Pin Fin Heat Sink $\Phi$ 48mm for Lumens

#### The product data table

	<b>Model No.</b>	GooLED-LUME-4850
	<b>Heatsink Size</b>	$\Phi$ 48xH50mm
	<b>Heatsink Material</b>	AL1070
	<b>Finish</b>	Black Anodized
	<b>Weight (g)</b>	64.0
	<b>Dissipated power (Ths-amb,50°C)</b>	10.0 (W)
	<b>Cooling surface area (mm<sup>2</sup>)</b>	24285
	<b>Thermal Resistance (Rhs-amb)</b>	5.0 (°C/W)


#### The thermal data table

\* Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.

\*To calculate the dissipated power please use the following formula:  $P_d = P_e \times (1 - \eta_L)$ .

Pd - Dissipated power ; Pe - Electrical power ;  $\eta_L$  = Light efficiency of the LED module;

Dissipated Power Pd(W)	Pd = Pe x (1- $\eta_L$ )	Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)
		GooLED-LUME-4850	
2.0		7.00	14.0
4.0		6.25	25.0
6.0		5.67	34.0
8.0		5.38	43.0
10.0		5.00	50.0

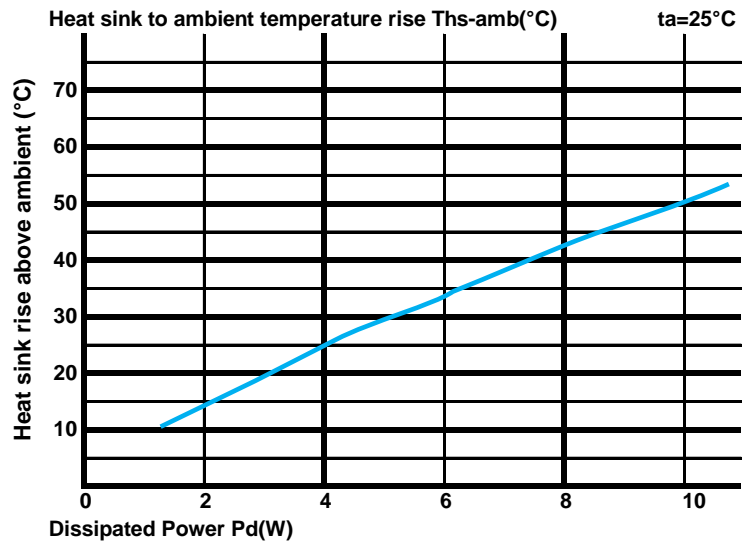

\*The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface material).

MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler.

Either thermal grease, A thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.



\*Thermal resistance is a heat property and a measurement of a temperature difference by which an object or material resists a heat flow.

Geometric shapes are different, the thermal resistance is different. Formula:  $\theta = (Ths - Ta) / Pd$

$\theta$  - Thermal Resistance [°C/W] ; Ths - Heatsink temperature ; Ta - Ambient temperature ;

\*The thermal resistance between the junction section of the light-emitting diode and the aluminum substrate side of the package outer shell is  $R_{junction-case}$ , the thermal resistance of the TIM outside the package is  $R_{interface (TIM)}$  [°C/W], the thermal resistance with the heat sink is  $R_{heatsink-ambient}$  [°C/W], and the ambient temperature is  $T_{ambient}$  [°C].

\*Thermal resistances outside the package  $R_{interface (TIM)}$  and  $R_{heatsink-ambient}$  can be integrated into the thermal resistance  $R_{case-ambient}$  at this point. Thus, the following formula is also used:

$$T_{junction} = (R_{junction-case} + R_{case-ambient}) \cdot Pd + T_{ambient}$$