




DE700TN

3 inch HF driver

Specification



Throat Diameter.....	36mm
Nominal Impedance.....	8ohms
Nominal Power Handling(1).....	80W
Continuous Power Handling(2).....	160W
Sensitivity(1M1W)(3).....	105dB
Frequency Range.....	1-18KHz
Voice Coil Diameter.....	75mm
Winding Material.....	Aluminium
Former Material.....	Kapton
Winding Depth.....	2.5mm
Magnetic Gap Depth.....	3mm
Fs.....	800Hz
Recommended crossover.....	1.2KHz
Inductance.....	0.14mH
Diaphragm Material.....	Titanium
Flux Density.....	1.8T
Magnet Material.....	Ferrite

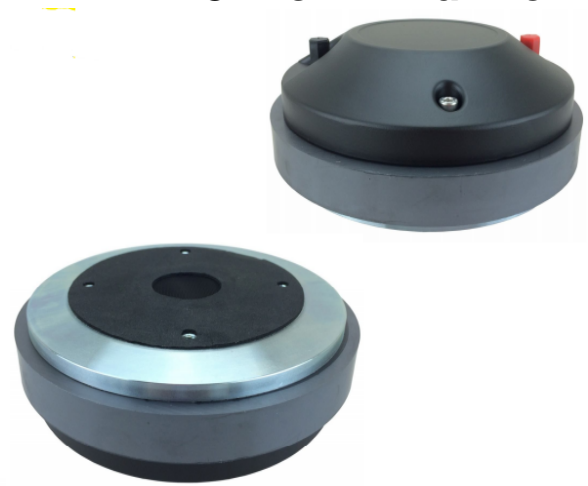

Mounting and Shipping Information

Overall diameter.....	171mm
Depth.....	65mm
Net Weight.....	4.4kg
Shipping Weight.....	4.6kg
Shipping Box.....	110*110*57mm

- (1) 2 hours test made with continuous pink noise signal(6 dB crest factor)
Power calculated on rated minimum impedance
- (2) Power on Continuous Program is defined as 3 dB greater than the nominal rating
- (3) Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance

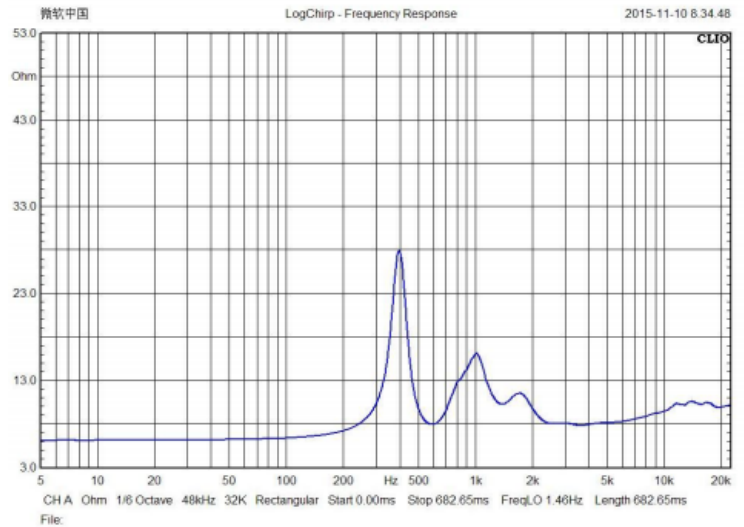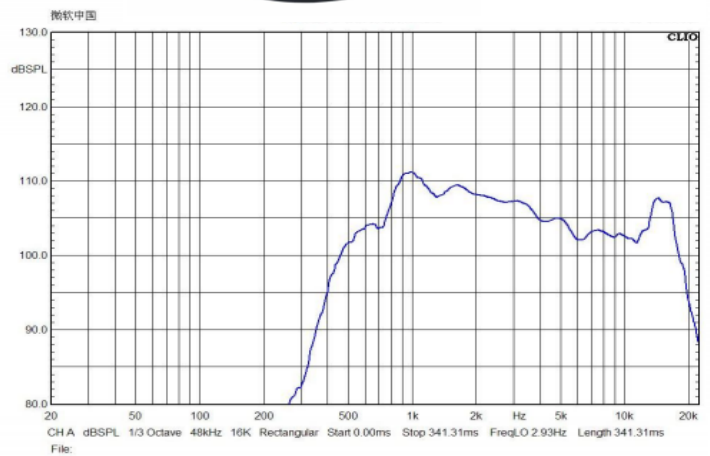

<https://www.china-sanway.com/>