
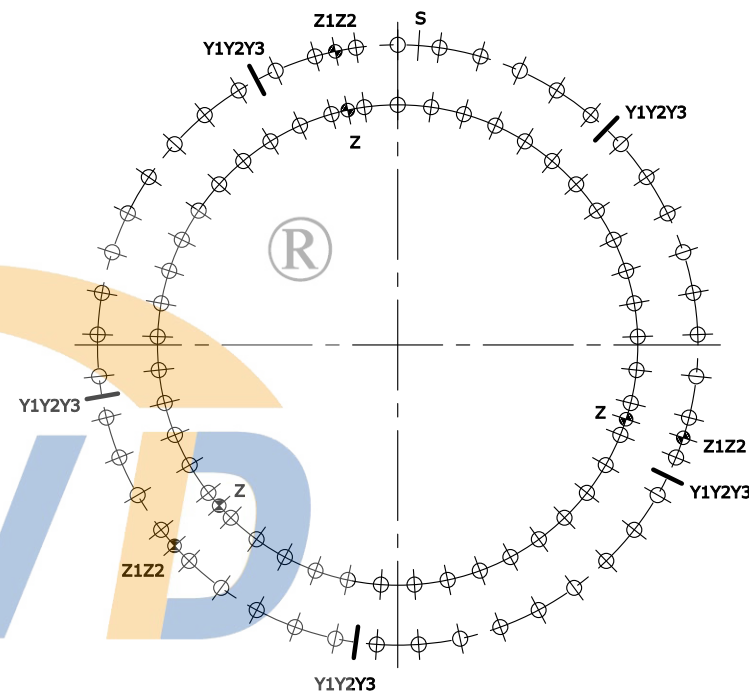



6.3
U.O.N

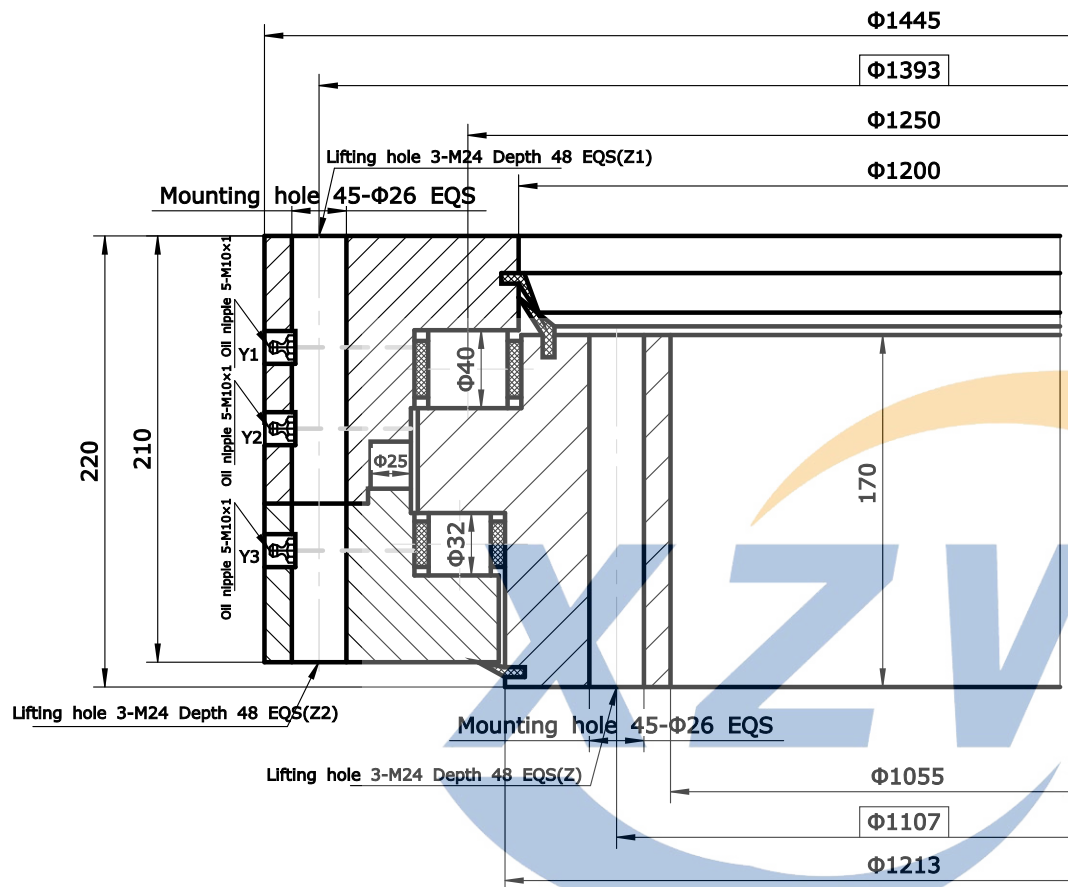

Notes:

1. Raceway of inner & outer ring induction hardened. hardness: 55~62HRC
Depth ≥ 3.5mm
2. Inner & outer ring quenched & tempered, hardness: 207~262HB

Gear Data				Design		Check		Model			
Module	m		Gear heat treatment requirements	Date		Approve		130.40.1250		Weight	1200kg
Teeth no	z							Name Slewing Bearing Qty		Scale	
Teeth pressure angle	α		Precision(GB10095-88)	Inner ring mounting hole	Qty	Size	Axial clearance	0.03~0.10	Material		
Modification coefficients	x			Outer ring mounting hole	45	Φ26	Radial clearance	0.06~0.25	50Mn	Total 1 page	The 1st page
Reduction coefficients	km			Oil hole	3×5	M10×1			XUZHOU WANDA SLEWING BEARING CO.,LTD		
Pitch diameter	d								 Fax: +86 516 83309366 Fax: +86 516 83915766 http://www.slew-bearing.com		
									Technical processing standards without notes according to ...JB/T2300-2011		