

XLED

xLED-CIT-6030 Pin Fin Heat Sink Ф60mm for Citizen

Features VS Benefits

- * The xLED-CIT-6030 Citizen Pin Fin LED Heat Sinks are specifically designed for luminaires using the Citizen LED engines.
- * Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- * For spotlight and downlight designs from 500 to 1,600 lumen.
- * Thermal resistance range Rth 5.0°C/W.
- * Modular design with mounting holes foreseen for direct mounting of citizen COB series.
- * Diameter 60mm standard height 30mm, Other heights on request.
- * Forged from highly conductive aluminum.

Zhaga LED engine and radiator assembly is a unified future international standardization

- * Below you find an overview of Citizen COB's and LED modules which standard fit on the Pin Fin LED Heat Sinks.
- * In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED Pin Fin LED Heat Sink.
























Citizen COB version 4, version 5, version 6 Series: CLU026-12xxxx; CLU028-12xxxx;

CLU027-12xxxx;

Citizen High intensity COB Series:

CLU701-03xxxx; CLU701-10xxxx;

With the Zhaga Book 11 holders for the green indicator marks.

BJB holder: 47.319.6294.50; AAG.STUCCHI: 8100-G2

Without the holders for the pink indicator marks.

Direct mounting with machine screws M3x6 5mm

With the LEDiL products: Olivia series: FN14637-S Ronda series: FN15xxx-xx; Molly series: C15xxx:

Citizen LED Modules directly Mounting Options

Citizen COB version 4, version 5, version 6 Series:

CLU036-12xxxx; CLU038-12xxxx;

Citizen High intensity COB Series:

CLU721-12xxxx; CLU711-12xxxx;

With the Zhaga Book 3 holders for the blue indicator marks. BJB holder: 47.319.2021.50; AAG.STUCCHI: 8101-G2 Without the holders for the red indicator marks. Direct mounting with machine screws M3x6.5mm.

With the LEDiL products: Olivia series: FN14637-S Ronda series: FN15xxx-xx Molly series: C15xxx;





Mounting Options and Drawings & Dimensions

Example:xLED-CIT-6030-B-1,2

Example:xLED-CIT-60 1 - 2 - 3

1 Height (mm)

2 Anodising Color

B-Black

C-Clear

Z-Custom

Mounting Options - see graphics for details Combinations available


Ex.order code - 12

means option 1 and 2 combined

Notes:


- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.

MOUNTING OPTION	Module type	Holder NO.	LEDiL products			THREAD	THREAD	THREAD HOLE
			Molly Series	Olivia series	Ronda series	INKEAD	DEPTH	DISTANCE
1	CLU026; CLU027 CLU028; CLU701	/	C15xxx;	FN14637-S	FN15xxx-xx;	М3	6.5mm	19.0mm/ 2-@180°
2		BJB Holder 47.319.6294.50				МЗ	6.5mm	25.0mm/ 2-@180° (Zhaga book 11)
		AAG.STUCCHI 8100-G2						
3	CLU036; CLU038 CLU721; CLU711	/	C15xxx;	FN14637-S	FN15xxx-xx;	М3	6.5mm	26.8mm/ 2-@180°
4		BJB Holder 47.319.2134.50				МЗ	6.5mm	35.0mm/ 2-@180° (Zhaga book 3)
		AAG.STUCCHI 8101-G2						

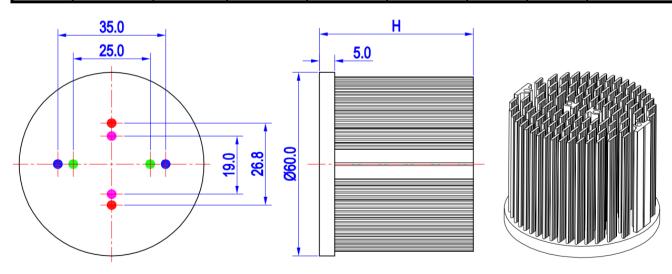




The product deta table

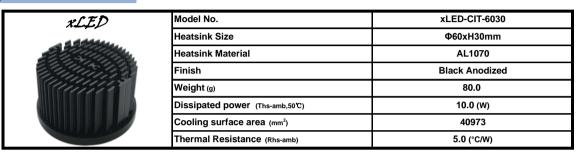

The thermal data table


- * Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.
- *To calculate the dissipated power please use the following formula: $Pd = Pe x (1-\eta L)$.
 - Pd Dissipated power ; Pe Electrical power ; ηL = Light effciency of the LED module;

Pd = Pe x (1-ηL)		Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)		
		xLED-CIT-6030			
(W)	3.0	6.67	20.0		
er Pd(6.0	5.67	34.0		
d Pow	9.0	5.11	46.0		
Dissipated Power Pd(W)	12.0	4.83	58.0		
	15.0	3.80	57.0		

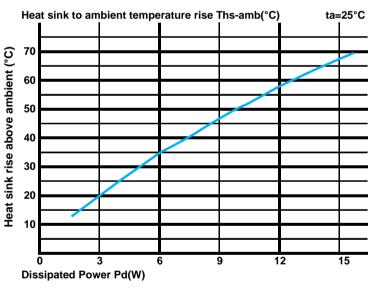

- *The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface material).
- $\label{thm:mingFa} \mbox{MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler.}$

Either thermal grease, A thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.



- *Thermal resistance is a heat property and a measurement of a temperature difference by which an object or material resists a Geometric shapes are different, the thermal resistance is different. Formula: θ = (Ths -Ta)/Pd
- θ Thermal Resistance [°C/W]; Ths Heatsink temperature; Ta Ambient
- *The thermal resistance between the junction section of the light-emitting diode and the aluminum substrate side of the package shell is $R_{junction\text{-}case}$, the thermal resistance of the TIM outside the package is $R_{interface\ (TIM)}$ [°C/W], the thermal resistance with the heat sink is $R_{heatsink\text{-}ambient}$ [°C/W], and the ambient temperature is $T_{ambient}$ [°C].
- *Thermal resistances outside the package $R_{interface \, (TIM)}$ and $R_{heatsink-ambient}$ can be integrated into the thermal resistance $R_{case-ambient}$ at this point. Thus, the following formula is also used: $T_{iunction}=(R_{iunction-case}+R_{case-ambient})\cdot Pd+T_{ambient}$

