

- This kind of tape can be laminated with release film
- This kind of tape can be supplied as customized discs


Technical Data

Feb .2015

Product Description

Creative™ Uniontape™ 1335TSY is a kind of glass cloth double backed silicone adhesive tape

Product Construction

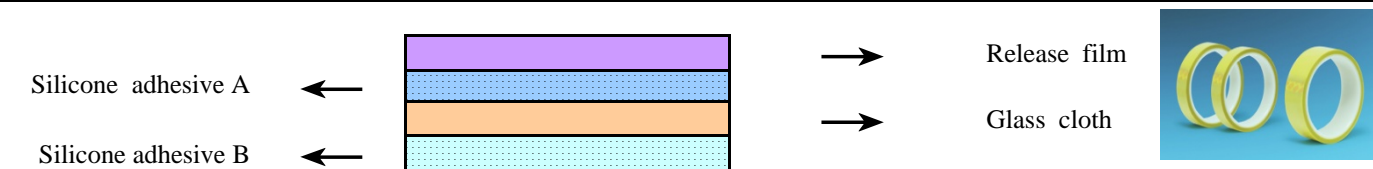

ITEMS	UNIT	VALUE	TESTING METHODS	REMARKS
Color		Yellow	Visual test	A
		White	Visual test	B
Backing Thickness	mm	0.130	ASTM D-3652	±0.002mm
Adhesive Thickness	mm	0.035	ASTM D-3652	A
		0.040		B
Adhesion to Steel	N/25mm	5.0~7.0	ASTM D-3330	A
		6.0~8.0		B
Temperature Resistance	°C/30min	280		
Standard Roll Length	m	33		

Features

Is is of chemical solvent resistance ,high adhesion.It is soft and could be re-utilized for many times.

Applications

PCB the soft board fixing.

Storage Conditions & Shelf life

Store under normal conditions of 73°F (23°C) and 20~80% R.H. in the original carton. To obtain best performance, the product should be used within 12 months from the date of manufacture.

Notes

All above-mentioned techniques are the average values obtained after our several testing by acknowledged and reliable testing methods. In order to ensure the correct selection and using of our products, please make a through understanding both of the purposes and conditions on usage in advance, or notify us as to provide you with further explanation and service.

Suzhou Creative Electronics Co., Ltd

Suzhou Plant

Add:No.209,Caofeng Road,Xukou Town,
Suzhou 215156, P.R.China

Suzhou Sales Office

Add:No.209,Caofeng Road,Xukou Town,
Suzhou 215156, P.R.China

Tel: 86-512-66935307

Fax: 86-512-66935399

Shanghai Creative Laminates Co., Ltd.

Shanghai Sales Office

Add:Room 2305, Building E, No.82 Caobao
Road, Shanghai 200235, P.R. China

Tel: 86-21-64836331, 64327879, 64327873

Fax: 86-21-64833821

www.uniontape.com

Email: sales@uniontape.com